


# **Heat Pump Food Dehydrator**







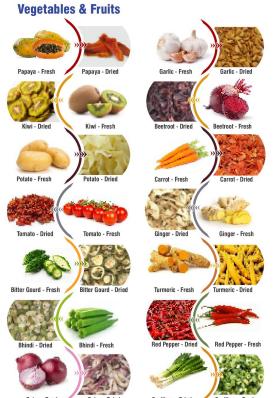



Ice Make Refrigeration Limited provides total cooling solutions with HCFCs/HFCs and Ammonia Refrigerants for various industry segments, now offers an innovative HEAT PUMP FOOD DEHDRATOR to improving food preservation technique for quality and reducing wastage of horticulture and floriculture produces, as well as it can be an eventual preserving technology for sustainable development and rural empowerment for small and marginal food processing entrepreneurs & farmers for products like fruits, vegetables, spices, herbs and other food products.

## What is Heat Pump Food Dehydrator?

A device that transfer heat from a colder area (ambient temperature) to a hotter area (drying chamber) by using mechanical energy (refrigeration technology).

Various Drying Energy Economy Comparison Table											
Heat energy require to evaporate 100 kg of water is 225000 kJ or 2.6 kW for 24 hour											
Fuel Type	Electric	Coal	Diesel	NG	LPG	Electric					
Heating Mode	Electric heating	Coal Boiler	Oil-fired Boiler	Gas Boiler	Gas Boiler	Heat pump					
Heat Value	3600 kj/kwh	23027 kj/kg	33494 kj/L	36006 kj/m3	46860 kj/kg	3600 kj/kwh					
Thermal Efficiency	95%	30%	85%	85%	90%	450%					
Effective Thermal Value	3420 kj/kwh	6908 kj/kg	28470 kj/kg	30605 kj/kg	42174 kj/kg	16200 J/kwh					
Fuel Price	7 ₹/kwh	5 ₹/kg	65 ₹/L	55 ₹/m3	60 ₹/kg	7 ₹/kwh					
Fuel Consumption	62.79 kwh	32.57 kg	7.9 L	7.35 m3	5.34 kg	13.89 kwh					
Fuel Consumption	439.5₹	163 ₹	513.5₹	404.25₹	320 ₹	97.23₹					
Labor Management,	Low	High	High	High	Low	Low					
Warehousing Costs											
Safety Performance	Unsafe	Unsafe	Unsafe	Unsafe	Safe	Safe					
Environmental Pollution	None	Very serious	More serious	More serious	Light pollution	None					
Life of Equipment	5-8 years	6-9 years	6-9 years	6-9 years	8-12 years	10-15 years					

## **Application**

#### **Drying Fruits:**

Apples, Apricots, Bananas, Coconuts, Dates, Figs, Grapes, Peaches, Pears, Pineapples, Plums, Breadfruit, Mango, Papaya, Nectarines, Jack Fruits, Guava, Pomegranate, Orange, Berry Fruits, Prunes, Cherries, Amla Fruit.

#### **Drying Vegetables:**

Cabbage, Carrot, Cauliflower, Beets, Corn, Radishes, Spinach, Potato, Tomato, Sweet Potato, Water Melon, Celeriac, Celery, Collards, Lettuce, Beans, Cucumbers, Garlic, Onions, Peppers, Sweet Corns, Okra, Coriander/cilantro, Cluster beans, Asparagus, Pickled Cucumbers, Bulbous Root, Marrow.

#### **Drying Agriculture Products:**

Rose, Chrysanthemum, Mushroom, Edible Fungus, Tobacco Leaf, White Fungus, Red Pepper, Daylily, Capsicum, Herbs, Horseradish, Winter Squash.

#### **Drying Herbs:**

Basil, Dill, Fennel, Lavage, Mint, Oregano, Parsley, Rosemary, Sage, Savoury, Scented, Geraniums, Tarragon, Thyme, Tea.

#### **Drying Seafood:**

Sea Fish, Squid, Shrimp, Sea ear, Trepan, Cuttlefish, Hippocampi

#### **Drving Food:**

Sausage, Preserved Pork, Smoke Fish, Rice, Noodle, Bean curd Sticks, Cooked Food

## **Working Principle**

Conventionally, materials are dried either in

the field (sun drying) or using high temperature dryers

(Electric, Gasfired, etc.) Successful outdoor drying depends upon good

weather. High temperature drying can damage the nutrient content, Speciality crops

such as Flower, herbs, Echinacea, fruits etc., need to be dried at low temperature

(30 to 45 °C) for product quality optimization. This is an important consideration as they have a relatively high commercial value. Heating ambient air to use for drying is a simple cost effective procedure is but at higher ambient air relative humidity, it is not possible to dry products at low allowable maximum temperature condition. High temperature drying deteriorates the material structure and can render it unsuitable for further use. Low temperature drying of specially crops reduces the risk of loss in Nutrient content and damage to physical properties. Ice Make Dehydration dryer incorporate with two systems.

- 1. Heat Pump
- 2. Dehumidifier

Heat Pump Function is to add the latent and sensible heat with low energy consumption. The running cost comparison of various system shown in Table.

Dehumidifier function is to remove moisture from drying chamber to maintain low relative humidity.

Premium Drying Quality

Exact Control of Temperature and Humidity

Clean, Hygienic & Easy to Operate

PLC Base Controlling

Occupies Minimum Space Retain
High
Nutrition

Highest Efficiency in

**Drying** 

**ICE MAKE** 

Trusted Cooling Partner

#### **Features**

- 1. Energy saving & Environmental protection
  Saving operating cost, No Heat Loss (insulation chamber and recirculation of hot air), low noise
- 2. Exact control of temperature and humidity


According to different material require different drying temperature, Heat pump can control drying Temperature between 30 to  $75\,^{\circ}$ C and relative humidity below  $25\,^{\circ}$ 

## **Technical Specifications:**

Model	Fresh (Wet) Product Capacity (kg)	Power Supply	Connected Power (kW)		Heating Capacity (kW)		Dehumidi- fication Capacity (L/H)	No of Trolley	of	Usable Tray Area (m2)	Dimension of Dryer (mm)
HPD0020	20 to 60	1ph. 230V	1.5 kW	1 kW	3.4	2.4	1.9	2	16	2.8	2100 x 838 x 1460
HPD0050	50 to 100	1 ph. 230 V / 3 ph. 400V	3 kW	2 kW	6	4.5	6	2	20	10	2500 x 1215 x 1285
HPD0100	100 to 250	3 ph. 400V	4.5 kW	3 kW	8.5	6.5	11	4	40	20	4648 x 2260 x 1473
HPD0300	300 to 450	3 ph. 400V	10 kW	6 kW	21.5	17.5	27	6	96	47	4910x 2350x 2150
HPD0500	500 to 750	3 ph. 400V	14 kW	9 kW	29	23.5	37	12	192	96	6520x 3375 x 2150
HPD0700	700 to 900	3 ph. 400V	21 kW	15 kW	45	37.5	60	16	256	128	7100 x 3450 x 2150
HPD1000	1000 to 1400	3 ph. 400V	26 kW	17 kW	58	47	74	20	320	160	10000 x 3450 x 2150
HPD2000	2000 to 2800	3 ph. 400V	47 kW	32 kW	103	85	120	36	612	307	11500 x 4400 x 2200

<sup>\*</sup> Product capacity is the fresh (wet) product loading capacity and it depends on product condition

<sup>\*\*</sup> Connected power, Heating capacity and cooling capacity is given at 15 °C Evaporating temperature And 60 °C condensing temperature

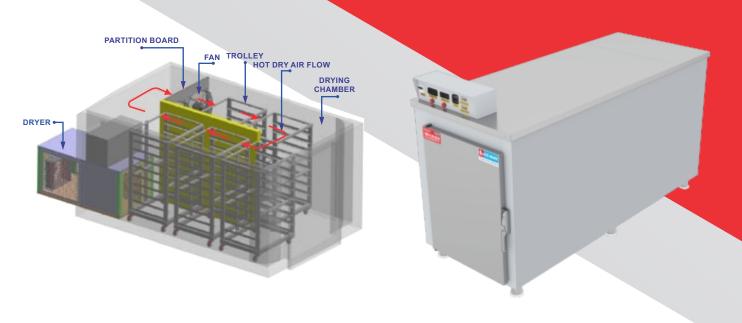





**Inside View** 









WEBSITE

CATALOGUE

**FEEDBACK** 

## ICE MAKE REFRIGERATION LIMITED

Commercial & Industrial Refrigeration Equipment Manufacturer & Exporter An ISO 9001:2015, ISO 14001:2015 and ISO 45001:2018 certified Company

Factory: 226, Dantali Industrial Estate, Gota-Vadsar Road, Nr. Ahmedabad City,

At-Dantali, Ta: Kalol, Dist.: Gandhinagar - 382721, Gujarat, India.

Ph.: +91 9879107881/884, Fax: +91-79-27540620

Office: B-1, Vasupujya Chamber, Nr. Navdeep Building, Income-Tax Cross Road, Ashram Road,

Ahmedabad - 380 014, Gujarat, India.

Ph.: +91-79-27540630, Fax: +91-79-27540620

E-mail: enquiry@icemakeindia.com | Web: www.icemakeindia.com |

Toll Free Sales No.: 1800-120-5061 | Toll Free Service No.: 1800-120-0230